




STAIRCASE PLAN LAYOUT

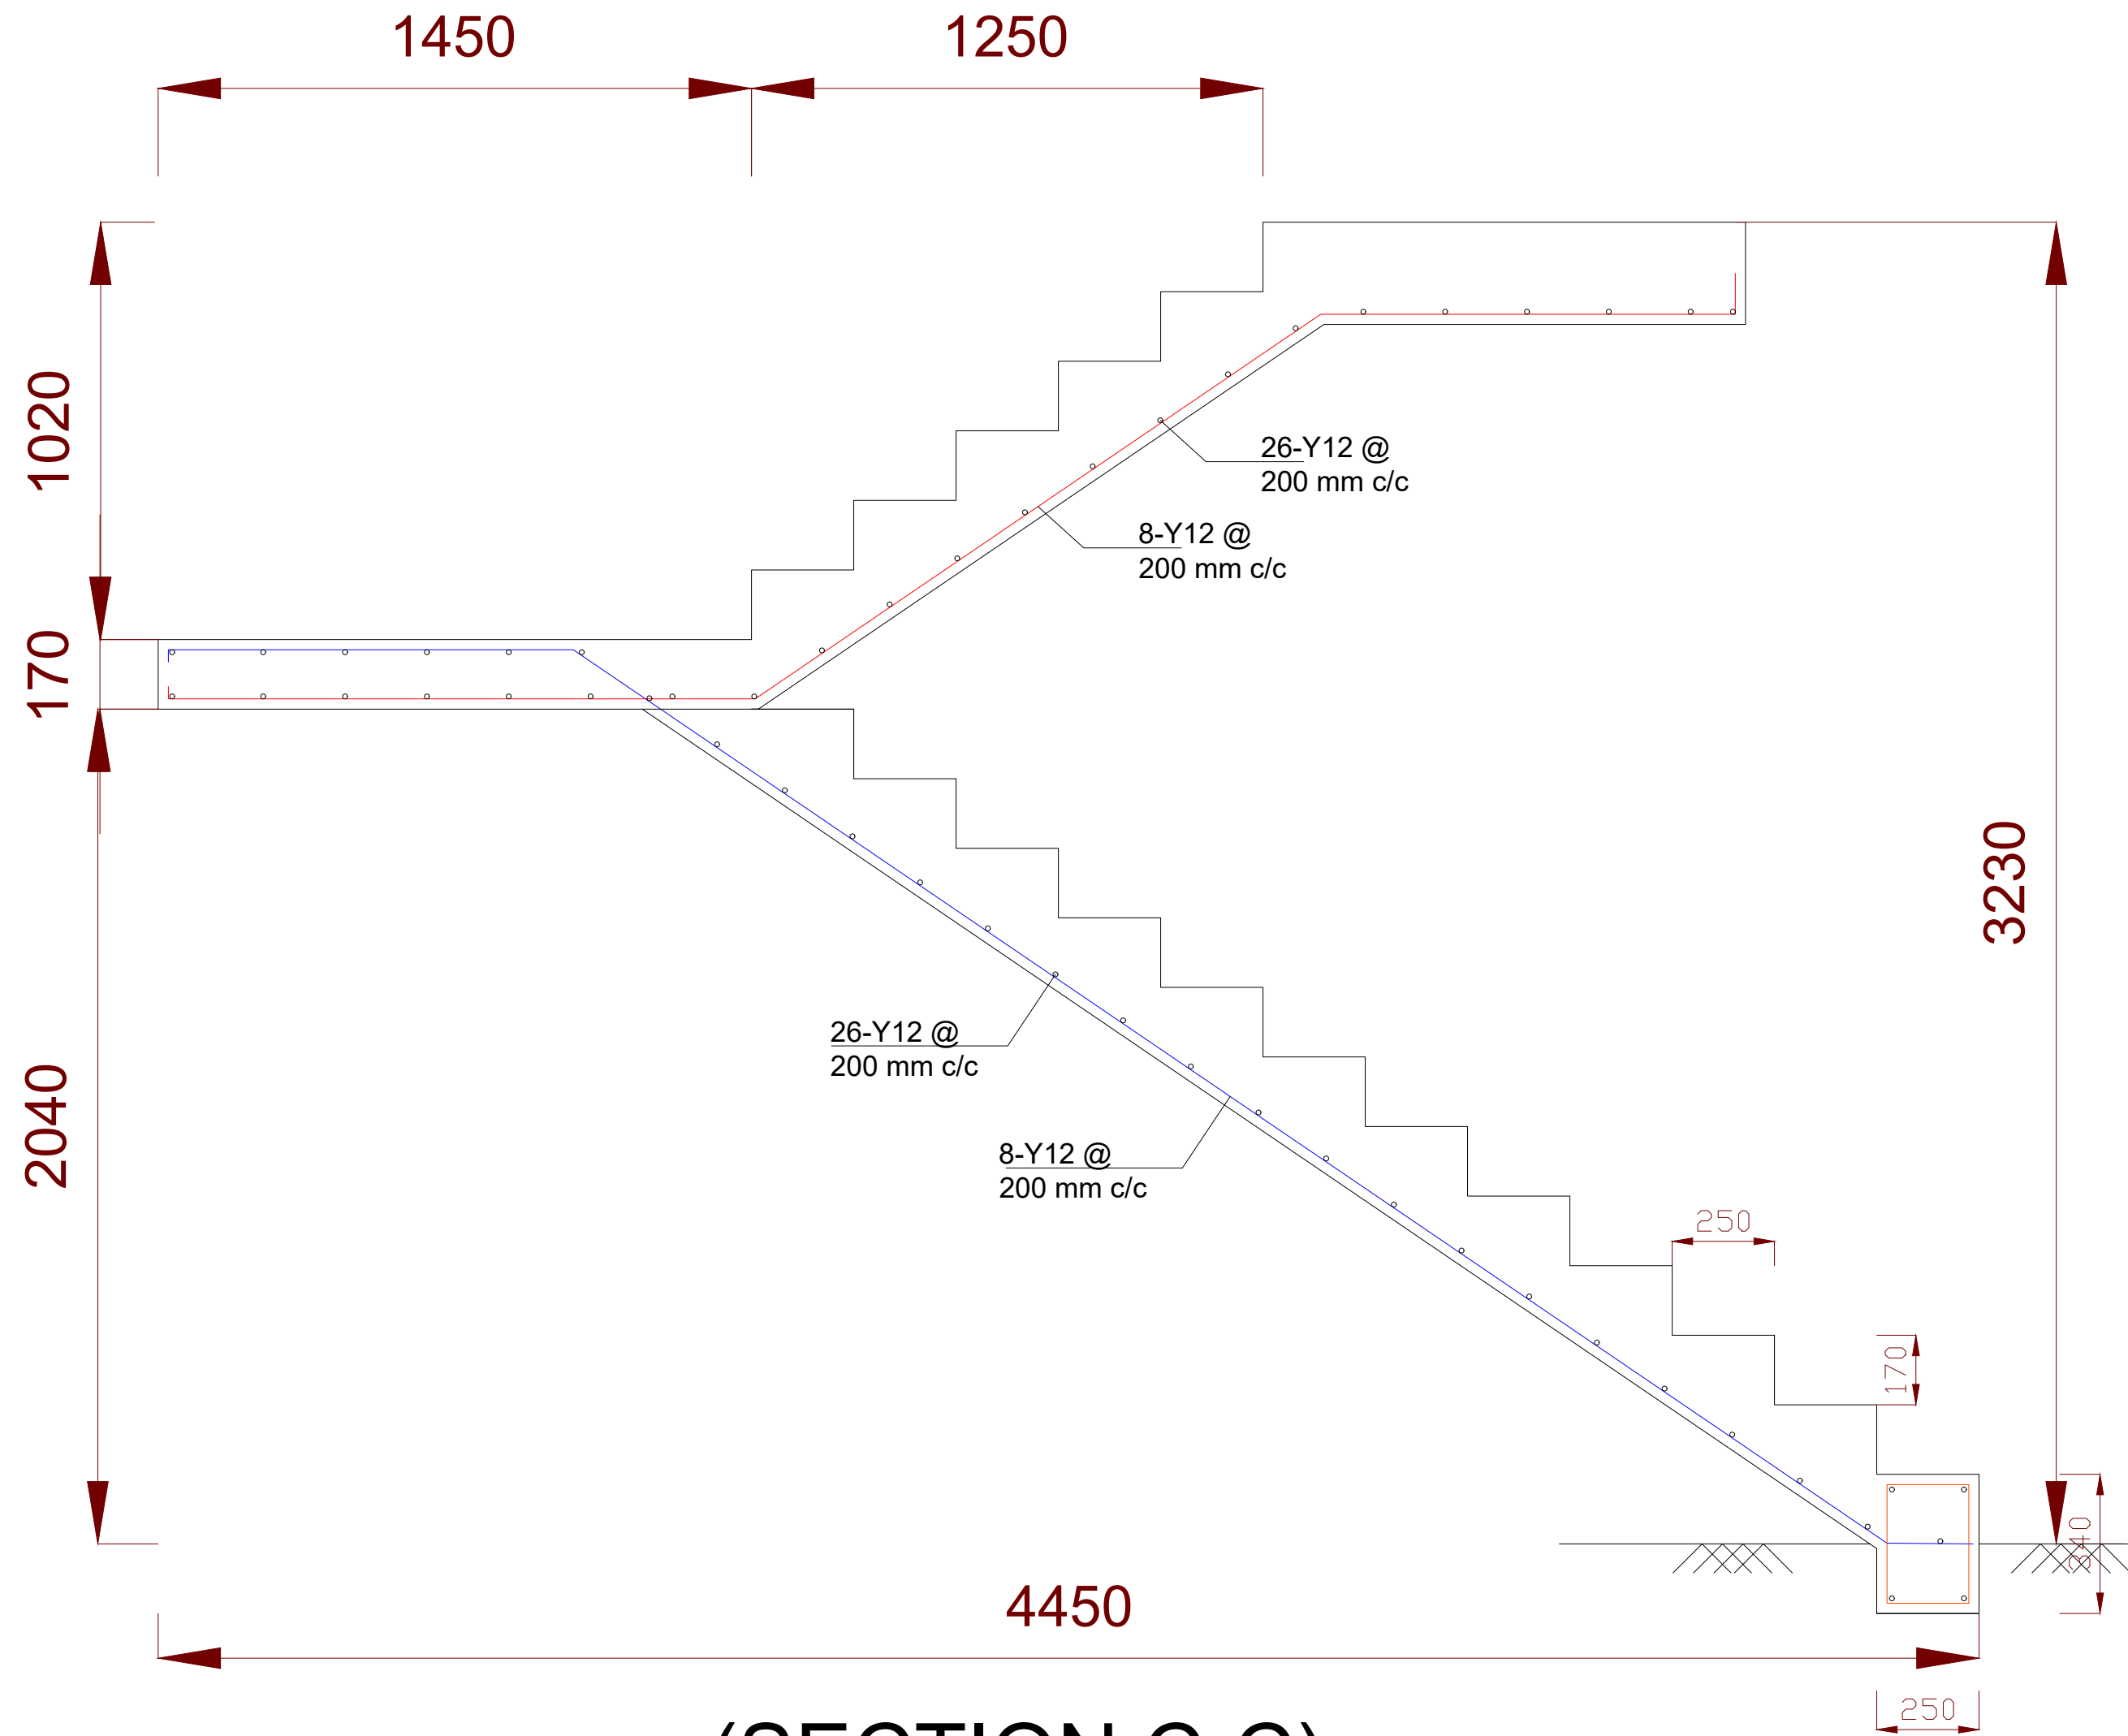

(SECTION C-C)

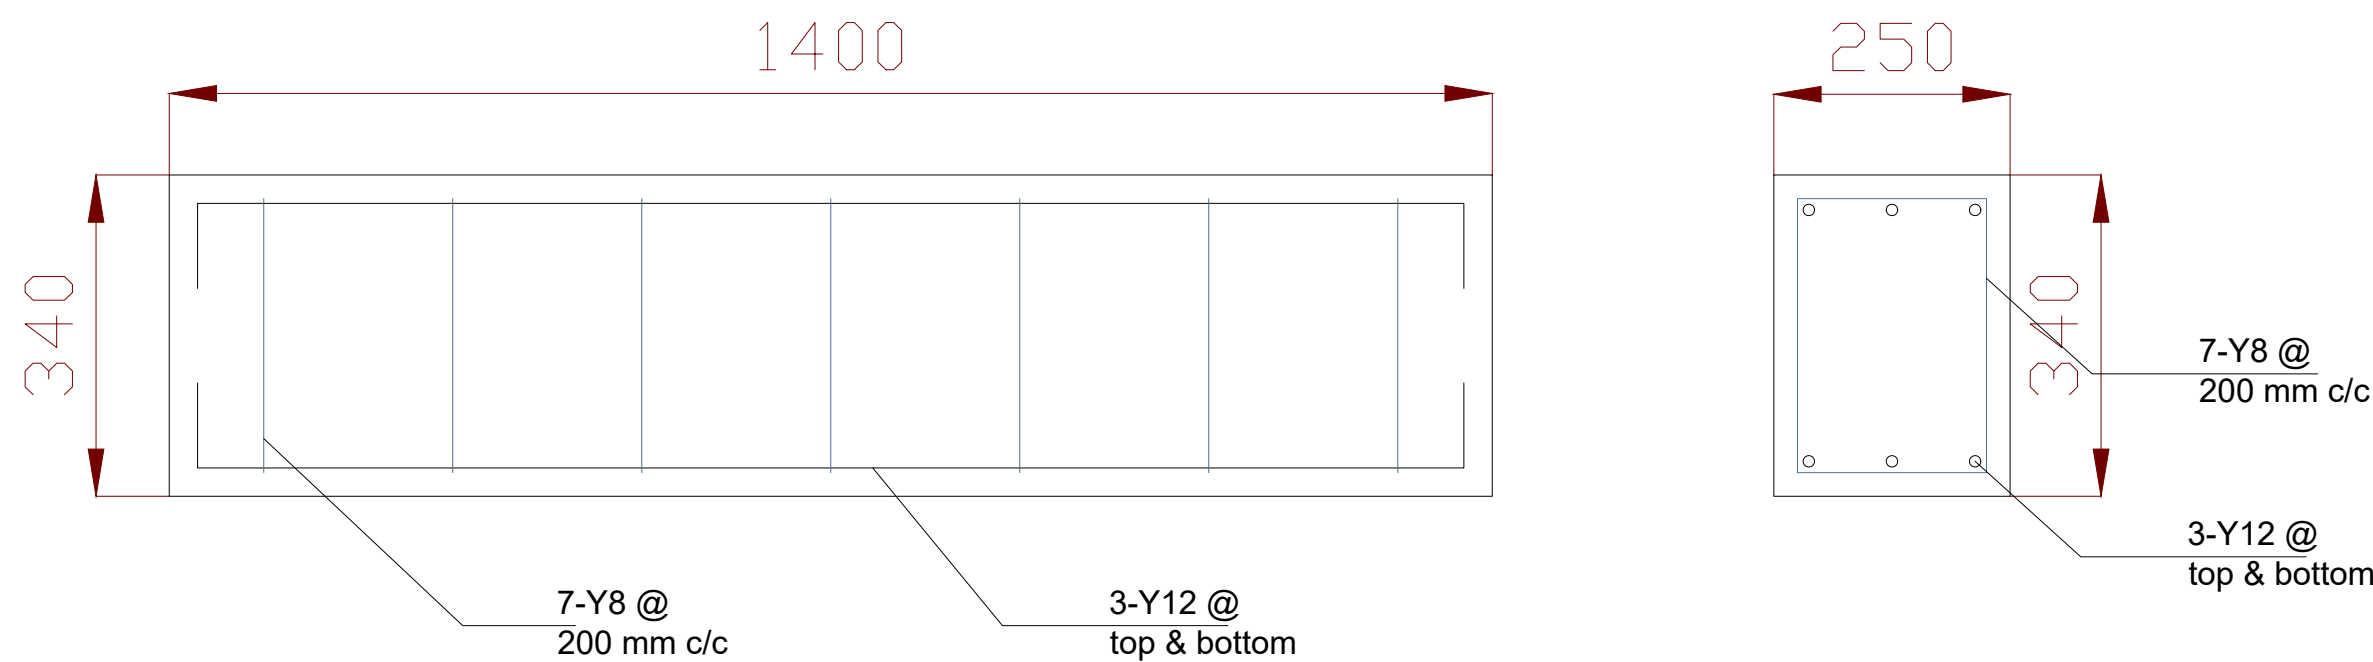

RC Staircase Ground beam  
340 x 250 mm

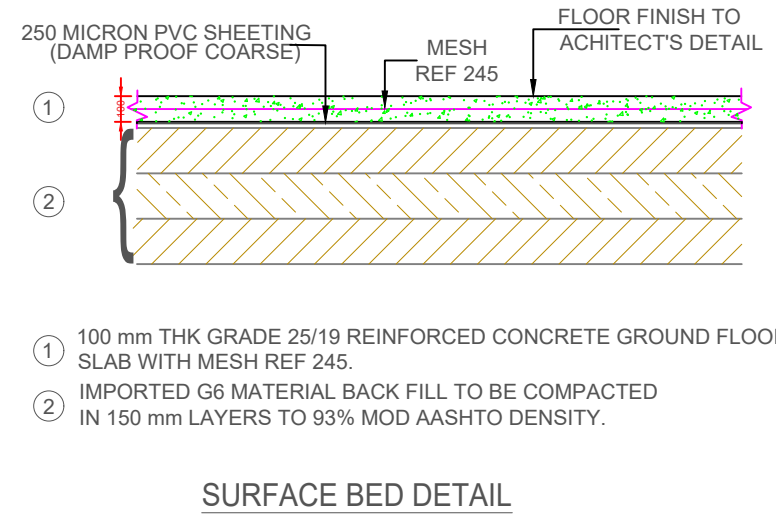

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S, ENGINEER'S AND OTHER SPECIALIST DRAWINGS, DETAILS AND SPECIFICATIONS.

ONLY WRITTEN DIMENSIONS & LEVELS ARE TO BE USED THIS DRAWING SHOULD NOT BE SCALED

THE ENGINEER'S WRITTEN APPROVAL SHALL BE OBTAINED BEFORE ANY VARIATIONS TO DRAWN DETAILS ARE IMPLEMENTED.

THE ENGINEER SHALL BE NOTIFIED, WITHOUT DELAY, IF ANY DISCREPANCIES EXIST BETWEEN DRAWN DETAILS AND THE SPECIFICATION.

OF THE LOCAL AUTHORITIES AND/OR STATUTORY BODIES WITH RESPECT TO CONSTRUCTION AND SAFETY REGULATIONS.

FOUNDATIONS LEVELS ARE TO BE CHECKED AND APPROVED BY THE ENGINEER PRIOR TO CASTING OF THE CONCRETE.

25 MPa MINIMUM AT 28 DAYS.

REINFORCEMENT COVER IS TO BE 25mm MINIMUM UNLESS SPECIFIED.

NO CONCRETE SHALL BE CAST BEFORE REINFORCEMENT HAS BEEN CHECKED AND APPROVED BY THE ENGINEER

TEST CUBES (6) MUST BE MADE FOR EVERY NEW CONCRETE POUR. TEST RESULTS MUST BE SUBMITTED TO THE ENGINEER FOR APPROVAL 3 TEST CUBES TO BE CRUSHED AT 7 DAYS AND 3 AT 28 DAYS

BRICK FORCE TO BE INCLUDED AFTER EVERY THREE(3) BRICK COURSES ABOVE DPC LEVEL AND EVERY BRICK COURSE OVER OPENINGS

MORTAR CLASS II TO BE USED ON ALL BRICKWORK

FINISHED FLOOR LAYOUTS TO BE CONFIRMED BY THE ARCHITECT. ALL FINISHED FLOOR LEVEL ON STRUCTURAL DETAILS WILL EXCLUDE 40mm SCREED

SPECIAL NOTES:  
ALL DRAWINGS AND DIMENSIONS MUST BE CORRELATED BEFORE ORDERING OR ANY BUILDING WORK COMMENCES ANY DIFFERENCES MUST BE BROUGHT TO THE ATTENTION OF THE ENGINEER IMMEDIATELY.  
COPYRIGHT IS RESERVED ON ALL DRAWINGS AND DESIGNS NO COPIES OR ANY REPRODUCTION OF ANY DRAWING MAY BE USED OTHER THAN THE SITE REFERRED TO.  
LEGAL ACTION WILL BE TAKEN IF ANY OF THE INFORMATION IS USED FOR ANY OTHER PROJECT WITHOUT CONSENT OF THE COPYRIGHT OWNERS.  
J.M. JANSEN VAN VUUREN PR TECH ENG (0470075) ENGINEER

| REVISIONS |        |       |      |
|-----------|--------|-------|------|
| No        | Drg No | Title | Date |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |
|           |        |       |      |

DRAWING NOTES

Recommended by: \_\_\_\_\_ Date: \_\_\_\_\_

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

Designed By: M. GAGAN

Design Approval App. J.M.V

Client App. \_\_\_\_\_ Date: \_\_\_\_\_



Project Title:  
**SPORTS FACILITIES IN WARD 43, ERF 272 (SERALENG & KARLIEN PARK) IN RUSTENBURG LOCAL MUNICIPALITY**

Drawing Title:  
**GRAND STAND STAIRCASE LAYOUT & DETAILS**

Issued For:  
**COORDINATION**

Drawing No: SER - MRC - 24 - 230 - 504

Rev No REV01

Date Issued: SEPTEMBER 2024